# PRIMUS® Monitor

Digital video HD-Monitor for all PRIMUS® endoscopic devices

- Integrated battery function
- Compatible with all PRIMUS® scopes
- DICOM connectivity
- Allows usage of two scopes simultaneously
- Use as stand-alone monitor or in combination with your video tower
- HD imaging quality in cystoscopy

| Order code | Specifications | | | | |
|---|---|---|---|---|---|
| | Max. resolution | Display | Internal storage capacity | Digital video output | Integrated battery |
| **MEDVM-D1** | **1920x1080** | 15.6“ TFT LCD | 64 GB | HDMI and SDI | 4 hours |

**Exclusive Distributor**
Urotech GmbH
Medi-Globe-Str. 1-5
DE-83101 Rohrdorf OT Achenmühle
Germany
Phone: +49 (0) 8032 - 973-210
Fax: +49 (0) 8032 - 973-211
E-Mail: info@urotech.com
www.urotech.com

Urotech GmbH is a company of the Medi-Globe-Group. For indications, contraindications, warnings and precautions, please refer to the product instructions for use.
©2025 Urotech. FL-0021.EN.v3-0225

UROTECH®
A MEDI-GLOBE COMPANY

# PRIMUS®

## Advanced Single-Use Endoscopic Imaging

**PRIMUS®**
**Uretero**

**PRIMUS®**
**Cysto**

*Your Partner in the Endourology*

- **Consistently sterile**
- **Consistently safe**
- **Consistently suitable**

# PRIMUS® Ureteroscope

**Premium variant -** all-in-one single-use flexible ureteroscope with 7.5 CH/FR outer diameter and included suction function

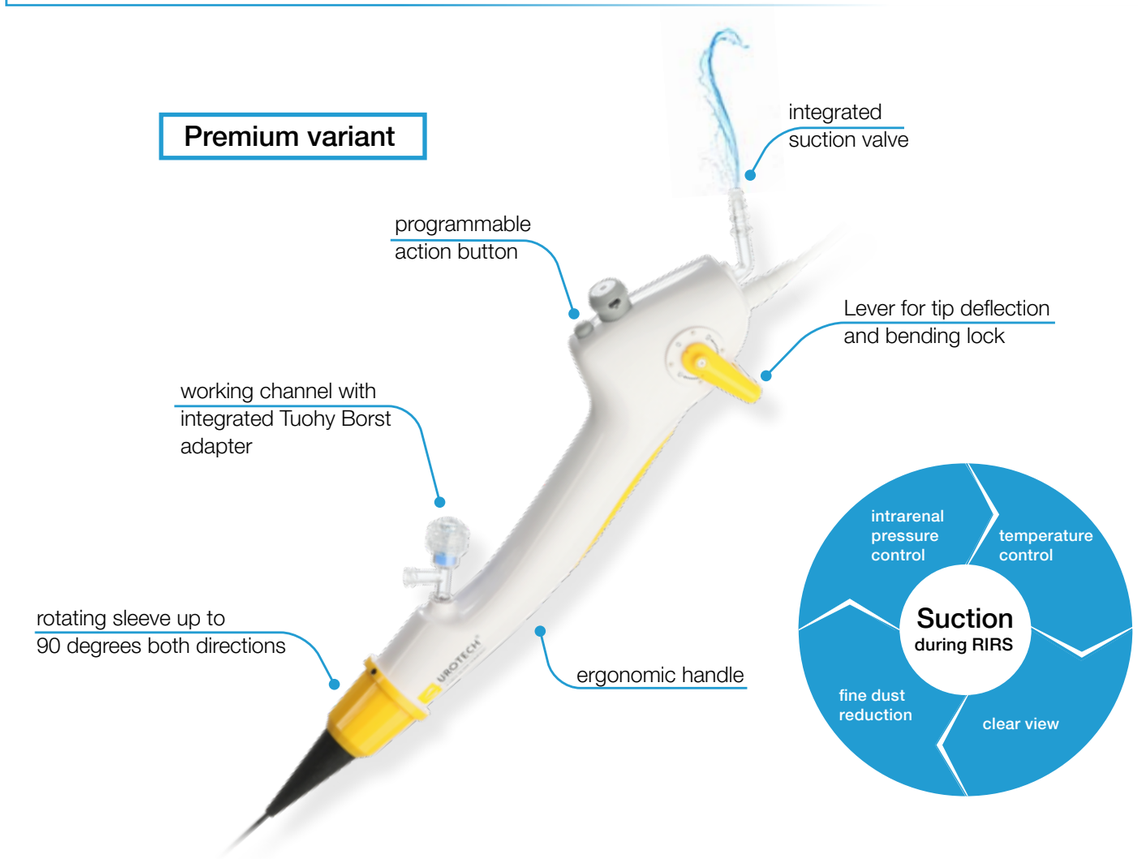


- **Safety** – always new, sterile ureteroscope, avoiding the need for reprocessing or repair
- **Precision** – rotatable sleeve for hard to reach areas
- **Improved handling** – bending lock to hold deflection in position
- **Performance** – suction function supports efficient procedures

| | Order code | Specifications | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| | | Outer diameter tube | Working length of shaft | Size working channel | Deflection (up/down) | Field of view | Bending Lock | Suction function (S) | Rotatable sleeve |
| Premium | URS-7.5S | **7.5 CH/FR** | 700 mm | 3.6 CH/FR | Standard 330°/330° Reverse (R) 330°/330° | 120° | Yes | Yes | Yes |
| Premium | URS-7.5S-R | | | | | | | | |
| Economic | URS-8.4 | **8.4 CH/FR** | 700 mm | 3.6 CH/FR | Standard 285°/285° Reverse (R) 285°/285° | 110° | No | No | Yes |
| Economic | URS-8.4-R | | | | | | | | |

# PRIMUS® Cystoscope

Single-use flexible high definition Cystoscope with 15.3 CH/FR outer diameter available also with suction function

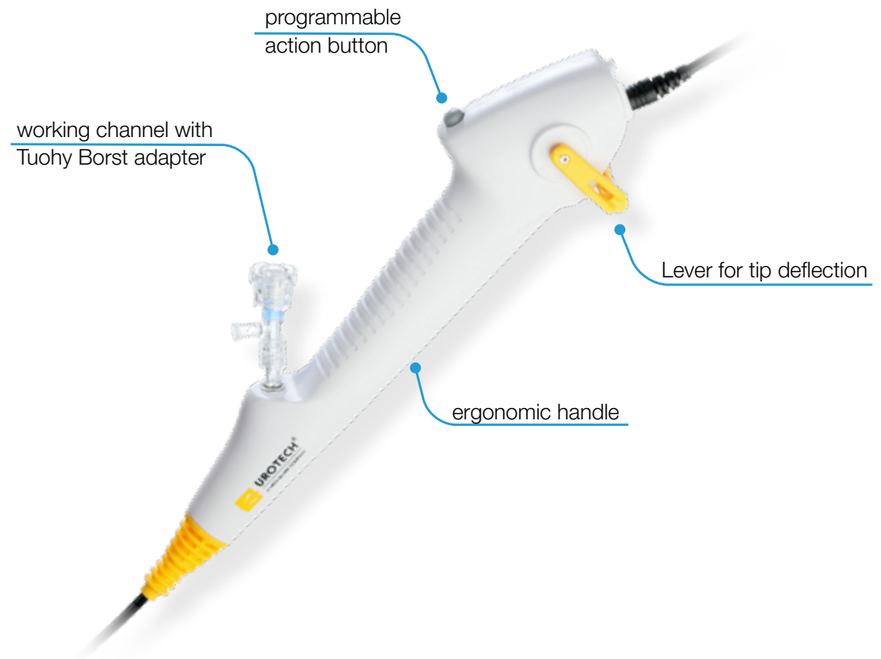


- **Safety** – always new, sterile cystoscope, avoiding the need for reprocessing or repair
- **Imaging** – compatible with the PRIMUS® Monitor, usable as display and/or processor unit
- **Performance** – suction function supports efficient procedures

| Order code | Specifications | | | | | |
|---|---|---|---|---|---|---|
| | Outer diameter tube | Working length of shaft | Size working channel | Deflection (up/down) | Field of view | Suction function (S) |
| CYSHD-16 | **15.3 CH/FR** | 400 mm | 6.6 CH/FR | Standard 210°/210° Reverse (R) 210°/210° | 110° | No |
| CYSHD-16-R | | | | | | |
| CYSHD-16S | | | | | | Yes |
| CYSHD-16S-R | | | | | | |